

REDLINE+ PACKING

Haynesville Basin



WE BUILD CONFIDENCE.

FIELD TEST CONDITIONS

SIZE


4"



NUMBER OF PUMPS

9

2500Q
HDF
Quint

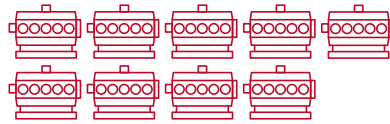

LOCATION

HAYNESVILLE
BASIN




MAXIMUM OPERATING PRESSURE

12,500 PSI



TIMELINE

12
WEEKS



TYPE OF SAND

100 MESH



VOLUME

532,000 LBS
SAND/STAGE

PRODUCED
WATER

YES

FRICION
REDUCER

YES

FLOW RATE

80 BPM

PERFORMANCE

FIELD DATA AVERAGES



289
HOURS



116
STAGES




11,000-
12,500 PSI

INCREASED PERFORMANCE LIFE



AVERAGE LIFE INCREASED
BY MORE THAN 2X OVER
STANDARD REDLINE



MAINTENANCE INTERVALS
EXTENDED BY 45%

CUSTOMER FEEDBACK



I AM IMPRESSED WITH REDLINE+
PACKING'S PERFORMANCE AND HOW
EASY IT IS TO INSTALL AND REMOVE
- SERVICE LEADER